# Research Article

# Electrochemical harvesting of the marine microalgae, Nannochloropsis oculata: Effect on approximate composition, fatty acid profile, and metals biosorption

# Shamsaie Mehrgan M.¹; Hosseini Shekarabi S.P.¹\*

Received: February 2021 Accepted: December 2021

#### **Abstract**

The effect of electrochemical harvesting of Nannochloropsis oculata by aluminum (Al), iron (Fe), and graphite electrodes on the approximate composition, fatty acids profile, harvesting efficiency, and metals biosorption was investigated. Based on the results, the highest content of crude protein was observed in the control and graphite electrode groups, while the lowest value was measured in Al electrode (p<0.05). The highest content of fat (21.95 % in dry weight) was obtained in the microalgae harvested by Al electrode compared to other treatments (p<0.05). Maximum level of saturated fatty acids was observed in the microalgae harvested by Al electrode (89.68 % of total fat) (p<0.05). However, the lowest levels of mono- and poly-unsaturated fatty acids were recorded in Al electrode treatment (p<0.05). The lowest harvesting efficiency (67.44 %) was observed in graphite electrode treatment (p<0.05). The highest biosorption of Al and Fe were in the microalgae harvested by Al and Fe electrodes, respectively (p<0.05). Overall, electrocoagulation technique using various electrodes caused significant changes in biochemical composition of N. oculata. Although the highest biosorption of metals was in the microalgae harvested by sacrificial electrodes and even out of the allowed range of human and animal consumption, they would be suitable for biofuel production.

**Keyword:** Microalgae harvesting, Fatty acids, Electrochemistry, Electrocoagulation, *Nannochloropsis oculata* 

.

<sup>1-</sup>Department of Fisheries, Science and Research Branch, Islamic Azad University, Tehran, Iran.

<sup>\*</sup>Corresponding author's Email: hosseini.pezhman@yahoo.com

### Introduction

Microalgae rapidly growing are autotrophic microorganisms which can be used in food industry, medicine, cosmetics. biofuel production and et al., 2019; Hosseini (Lauritano Madani et al., 2020). Nannochloropsis oculata is a marine microalga (Eustigmatophyceae) which has a size of about 2-3 um. Although this microalga is well-known for its ability to produce polyunsaturated fatty acids (PUFAs) such as eicosapentaenoic acid (EPA) (Kagan et al., 2014; Borges et al., 2016), several studies have shown the possibility of growing N. oculata on a large-scale for biofuel purposes (Richmond, 2008; Sabzi et al., 2021). However, species belong Nannochloropsis cannot be separated culture medium from the conventional filtration methods due to their small size (Chua and Schenk, 2017). Therefore, finding a fast and cost-effective method to harvest N. oculata with minimal negative impacts on its quality can be a significant step towards industrial production of this microalga.

A bottleneck to the commercial production of microalgae is harvesting methods (Borges *et al.*, 2011, 2016; Yin *et al.*, 2020). In fact, utilization of microalgae from the media accounts up to 30% of total processing cost (Al-Yaqoobi *et al.*, 2021; Krishnamoorthy *et al.*, 2021). Although various chemical and natural coagulants are used to flocculate microalgae (Anthony *et al.*, 2013), high concentrations of chemical coagulants (*e.g.* aluminum

sulfate, iron chloride, and ferrous sulfates) may adversely affect the quality of the cell's compounds and impact the environment (Misra et al., 2014). Recently, harvesting microalgal biomass by electrocoagulation process is introduced as one of the fastest, most efficient, and cheap methods harvesting microalgae (Matter et al., 2019; Al-Yagoobi et al., 2021). In this electrochemical harvesting regard, (ECH) method is based on production of metal ions from oxidizing metal electrodes as well as micro-bubbles to facilitate coagulation of microalgae on the surface and/or precipitate at the bottom (Gao et al., 2010; Perreault et al., 2010; Kim et al., 2012a; Matter et al., 2019). Moreover, the microalgae membrane has a negative electric charge due to presence of acidic polysaccharides and therefore. neutralizing negative charges of the cells bv produced cations from electrodes in the ECH method causing the microalgae cells to be accumulated and precipitate (Safi et al., 2014). Besides, the capital cost of ECH method (0.35 USD m<sup>3</sup>) was much lower flocculation with chemical than  $m^3$ ) 0.47 substances (USD centrifugation (0.53 USD m<sup>3</sup>) methods (Liu et al., 2018). In terms of harvesting efficiency, using syntactic flocculants to harvest 1 kg of algal biomass depends on the chemical used, acquire 2.30-15.3 USD compared to 1.15 USD for ECH method (Krishnamoorthy et al., 2021).

Recently, one of the most important challenges for commercial-scale

applications of microalgae is related to harvesting process, which is inefficient and costly, so research in this field is needed much and valuable (Krishnamoorthy al., et 2021). Utilization of microalgae with ECH method compared to the conventional methods has several advantages in large-scale applications, such as no direct side effects on the target metabolites (e.g., unsaturated lipids, and carbohydrate), protein. lower operation costs and energy consumption, easy to control, high efficiency, and less toxicity (Ghernaout, 2019; Hua et al., 2020; Al-Yaqoobi et al., 2021; Krishnamoorthy et al., 2021). However, chief drawbacks of ECH method are short lifetime of electrodes and biomass contamination with metal oxides by excessive doses of dissolved anode material in sacrificial electrode use (Matter et al., 2019). Therefore, this study aimed to assess the effect of harvesting N. oculata by ECH method using different sacrificial electrodes including aluminum (Al) and iron (Fe) non-sacrificial electrode and (graphite) on biochemical composition and fatty acids profile.

#### Materials and methods

Experimental design

N. oculata strain PGBP-abdf1127 (GenBank: KP258172.1) was prepared from Persian Gulf Biotechnology Park (PGBP) and cultivated in F/2 culture medium (Guillard and Ryther, 1962) at Zakariya al-Razi Complex Laboratory Center (Science and Research Branch, Islamic Azad University, Tehran, Iran)

based on Sabzi *et al.* (2021) method. The microalgae were grown under 80  $\mu$ mol photon/m²s light intensity,  $26\pm0.5^{\circ}$ C temperature, and 12:12 h (dark: light) light cycle conditions. After 14 days, algal biomass was separated from the culture medium during the log phase (~  $40\times10^6$  cells/mL) by ECH technique using different electrodes.

To harvest N. oculata by ECH method, a transparent plastic container (cylindrical reactor, 10 L) was equipped with two electrodes (10×4 cm) to clot the algal cells. The electrodes were connected to a direct current (DC) source at a 6-volt adapter and a current of 4 Amps (Misra et al., 2015). Distance from the end of the electrodes to the bottom of the reactor was 8 cm and distance between the electrodes was 1 cm (Fig. 1). Electricity was on for 15 minutes in each treatment. A magnetic stirrer was used to mix the medium inside the reactors at 200 rpm during chemical electrolysis process.

In this study, experimental groups consisted of uniform sacrificial (Al and non-sacrificial (graphite) electrodes  $(1\times1\times10 \text{ cm})$ . Additionally, centrifugation harvesting method  $(3700 \times g)$ at 4°C; Sigma 3-30K, Osterode, Germany) was considered as control group. Harvested biomass from all groups were lyophilized by a laboratory freez-dryer (Christ Alpha 1– 4. Martin Christ Gefriertrocknungsanlagen GmbH. Osterode, Germany) at -54°C and a pressure of 0.04 mbar for 24 h to minimize the effects of heating on the biochemical compounds of the microalgae (Hosseini Shekarabi *et al.*,

2020).

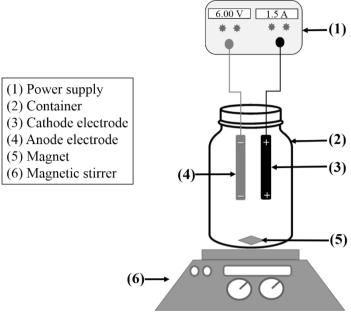


Figure 1: Schematic diagram of electrochemical technique for harvesting *N. oculata* biomass by different electrodes.

# Approximate composition

To measure lipid content, 10 g of the harvested biomass (dry weight) from each treatment was gently homogenized in a mortar to obtain a fine powder and then, the lipid content was extracted by method of Folch et al. (1957). One gram of the lyophilized algae was placed in oven at 105°C for 6 hours to calculate moisture content (AOAC, 2000; method 976.05). Ash content was obtained using electric oven at 550°C until the samples' color was completely white (AOAC, 2000; method 923.03). To measure crude protein content, one gram of the lyophilized algae was digested with sulfuric acid. Then, nitrogen was extracted and titrated with 0.5 N hydrochloric acid using a semiautomatic Kjeldahl apparatus (V50, Bakhshi, Tehran, Iran) and converted to protein content (N  $\times$  6.25) (AOAC, 2000; method 976.05).

Determination of fatty acid composition To determine the composition of fatty acids, derivatization of fatty acids was first performed by boron trifluoride in methanol for 150 mg of the extracted oil (Hosseini Madani et al., 2021). The mixture was heated in water bath at 80°C for 2 min and cooled to ambient temperature. The obtained organic phase (fatty acid methyl esters) was injected into a gas chromatograph (ACME 6100, Young Lin Instrument Co., Anyang, Korea), equipped with a DB-WAX capillary column (30 m length, 0.25 mm inner diameter, and 0.25 mm thickness) and a thermal conductivity detector. **Temperature** reached to 180°C and maintained for 5 min and then increased to 220°C at 4°C/min rate and was maintained at this temperature for 25 min. Helium was used as a carrier gas at a rate of 1.5 mL/min. Obtained peaks of fatty acid methyl esters were identified by comparing their retention time with those of authentic standards (Fatty Acid Methyl Ester Mix, 18917AMP; Supelco, Sigma-Aldrich, USA).

# Determination of metals residual

To determine heavy metals concentration, 10 mg of dried algal biomass was first digested by nitric according to atomic acid. Then, absorption spectrometer's guidelines SpectrAA-200 (Varian atomic absorption apparatus, Varian Co., Melbourne, Australia) as well as calibration curves of Al and Fe, the concentrations of the elements were calculated in the solutions (Ahmad and Shuhaimi-Othman, 2010).

## Harvesting efficiency

To measure harvesting efficiency, optical density (OD) of the samples in pre-harvest medium (OD<sub>i</sub>) and post-harvest medium (OD<sub>f</sub>) was measured by a UV-VIS spectrophotometer (Varian Cary 50, Varian Inc., Palo Alto, California, USA) at 680 nm after 5 min from the end of each electrochemical harvesting method as follows (Vandamme *et al.*, 2011):

Harvesting efficiency (HE, %)= 
$$\left[\frac{(\text{ODi} - \text{ODf})}{\text{ODi}}\right] \times 100$$

### Statistical Analysis

All experiments were performed with three replicates (n=3) and the data were presented as mean ± standard deviation (SD). After checking the normality and homogeneity of the data Kolmogorov-Smirnov and Barlett's tests, respectively. One-way analysis of variance (ANOVA) was performed followed by Tukey's post-hoc test to compare the means at 95% (p<0.05). Data were analyzed using SPSS software version 22.

#### Results

As shown in Table 1, the contents of fat, protein, and ash of N. oculata harvested by different electrodes were significantly different (p<0.05). The highest level of crude protein was observed in control and graphite electrode groups (p<0.05), while the lowest value was measured in Al electrode treatment (p<0.05). Regarding fat and ash contents, the highest values were obtained in the microalgae harvested by Al electrode (p<0.05).

The composition of fatty acids in the microalgae harvested by ECH method using different types of electrodes is presented in Table 2. Based on the results, 13 fatty acids were detected and the dominant saturated fatty acid (SFA) was palmitic acid (16:0). The content of oleic acid (18:1) as the monounsaturated fatty acid (MUFA) was decreased in experimental groups and the lowest value was obtained in Al electrode treatment (p<0.05). The highest EPA was measured in control and graphite electrode groups, while the lowest value was observed in Al electrode treatment (p<0.05).

According to Figure 2, the highest and lowest levels of SFA were measured in Al electrode treatment (75.96 $\pm$ 1.33% of total fat) and control group (47.32 $\pm$ 0.86% of total fat), respectively (p<0.05).

However, the lowest levels of MUFA and PUFA were recorded in Al electrode treatment (p<0.05). Maximum amount of MUFA was also seen in control group (34.68±0.74 % of total fat) (p<0.05).

Table 1: Effect of electrochemical harvesting technique using different electrodes on approximate composition of *N. oculata* (% in dry matter).

Parameter	Treatments						
(% in dry matter)	Control	Al electrode	Fe electrode	Graphite electrode			
Protein	48.48±0.19 a	41.55±0.10 °	44.89±0.15 b	48.02±0.31 a			
Lipid	18.30±0.25 °	21.95±0.07 a	20.36±0.12 b	18.82±0.33 °			
Ash	20.02±0.23 °	23.79±0.19 a	21.10±0.04 b	19.26±0.04 °			
Moisture	5.61±0.14 a	5.64±0.23 a	5.60±0.08 a	5.59±0.01 a			

Values are presented as mean  $\pm$  standard deviation. Different letters in each row indicate significant differences (n=3, p<0.05). Harvesting method in control group was centrifugation method (3700  $\times g$ , 4°C, 10 min).

Table 2: Fatty acids profile of *N. oculata* after harvesting by electrochemical method using different electrodes (% of total fat).

	Treatments				
Fatty acids	Control	Al electrode	Fe electrode	Graphite electrode	
Butyric acid (C4:0)	8.18±1.10 a	7.77±0.06 a	2.06±0.17 b	8.16±0.30 a	
Caproic acid (C6:0)	2.59±0.01 b	3.40±0.06 a	$0.74\pm0.05^{d}$	2.24±0.08 °	
Caprylic acid (C8:0)	12.93±0.11 °	20.86±0.15 a	6.36±0.54 <sup>d</sup>	15.69±0.40 a	
Decanoic acid (C10:0)	7.85±0.08 °	8.42±0.49 b	9.38±0.20 a	5.14±0.02 d	
Myristic acid (C14:0)	3.06±0.54 a	1.28±0.30 b	1.88±0.18 b	3.43±0.41 a	
Palmitic acid (C16:0)	12.71±0.50 d	34.23±1.03 a	32.53±0.37 b	19.23±0.47 °	
Stearic acid (C18:0)	3.94±0.03 b	5.70±0.29 a	5.86±0.14 a	3.76±0.03 b	
Palmitoleic acid (C16:1)	2.05±0.08 a	0.31±0.04 d	0.56±0.01 °	1.42±0.06 b	
Oleic acid (C18:1; n-9)	31.53±0.40 a	14.01±0.30 d	29.60±0.67 b	27.35±0.03 °	
Erucic acid (C22:1)	1.10±0.09 a	0.36±0.08 °	0.83±0.05 b	1.20±0.02 a	
Linoleic acid (C18:2; n-6)	10.07±0.14 a	2.30±0.01 <sup>d</sup>	7.65±0.63 °	8.52±0.60 b	
Linolenic acid (C18:3; n-6)	0.50±0.05 a	0.10±0.00 b	0.49±0.02 a	0.13±0.00 b	
Eicosapentaenoic acid (EPA; C20:5; n-3)	3.10±0.10 <sup>a</sup>	0.73±0.08 °	1.64±0.05 b	3.38±0.24 <sup>a</sup>	
Total	99.36	99.28	99.37	99.45	

Values are presented as mean  $\pm$  standard deviation. Different letters in each row indicate significant differences (n=3, p<0.05). Harvesting method in control group was centrifugation method (3700×g, 4°C, 10 min).

Concentrations of Al and Fe in the dried algal biomass are illustrated in Table 3. The highest accumulation of

Fe by microalgae cells was recorded in Fe electrode treatment compared to the other groups (p<0.05), while no

significant difference was found among experimental groups to uptake Fe (p>0.05). In terms of Al concentration,

it was only detected in Al electrode treatment.

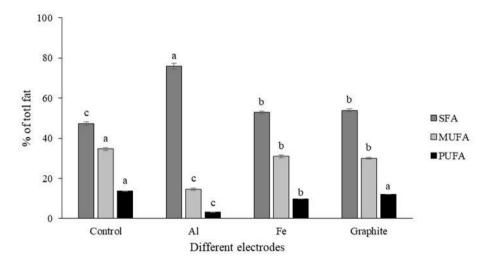


Figure 2: Changes in saturated fatty acids (SFA), monounsaturated fats (MUFA), and polyunsaturated fatty acids (PUFA) of harvested N. oculata by an electrochemical technique using different electrodes. Different superscripts indicate significant differences (n=3, p<0.05). Error bars show standard deviation.

Harvesting efficiency of the microalgae was influenced in different treatments and the highest value was obtained in Al electrode treatment which was not significantly different from control group (p>0.05; Fig. 3). However, the lowest harvesting efficiency value was observed in graphite electrode (p<0.05; Fig. 3).

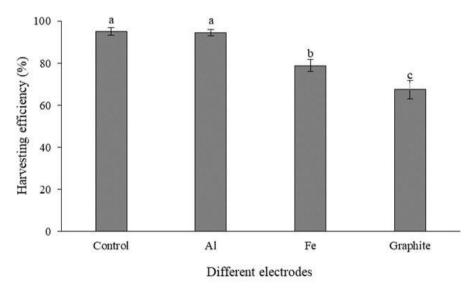


Figure 3: Effect of electrochemical technique using different electrodes in harvesting efficiency (%) of N. oculata. Different superscripts indicate significant differences (n=3, p<0.05). Error bars show standard deviation.

#### Discussion

The ability to accumulate lipids in different microalgae species is highly dependent on cultivation condition and composition of nutrients in the culture medium (Borges et al., 2011; Gao et al., 2013; Rastar et al., 2018; Sabzi et al., 2021). However, quantity and quality of microalgae lipids can be altered by different harvesting methods (Borges et al., 2011, 2016; Hua et al., 2016). In the present study, higher content of lipid was observed in N. oculata harvested by Al and Fe electrodes compared to graphite electrode and control groups. This increase in extraction of lipids may be related to higher cellular damages due shock and oxidative osmotic to destructions of released Al ions in the reactor (Yoo et al., 2012: Lee et al., 2013).

Based on our results, crude protein content of the microalgae harvested by graphite electrode and control groups was significantly higher than other treatments. Higher protein degradation ratio in the microalgae harvested by sacrificial electrodes may be due to extensive damages (e.g. oxidative Fenton-active metal ions oxidation process) and hydroxyl radicals products (Stadtman, 1990). However, more sensitive methods rather than Kjeldahl method in direct protein detection are recommended to compare with our results.

The highest level of ash was seen in *N. oculata* harvested by metal electrodes, especially in Al electrode treatment. This can be attributed to biosorption of

released metals from sacrificial electrodes in the microalgae cells during ECH process. Baierle et al. (2015) represented that ECH techniques microalgae with inorganic flocculants, especially Al, lead to significant decrease in heavy metals concentration of wastewater. This can easily approve that microalgae had ability to bio-absorb released metals from sacrificial metal electrodes and subsequently increase the ash content.

Our findings showed that maximum content of unsaturated fatty acids was in oculata harvested by graphite electrode compared sacrificial to electrodes, while maximum level of SFA was obtained in the microalgae harvested by Al electrode. Misra et al. (2014) similarly showed that harvesting Chlorella sorokiniana and Tetradesmus obliquus by graphite electrodes did not have a negative effect on composition of fatty acids compared to conventional centrifugation method. Using nondestructive electrodes in ECH method not only released no metal ions to the environment but also oxidative processes would be at the lowest rate, which can prevent breaking down the chains and carbon double bonds of unsaturated fatty acids in post harvested microalgae (Singh et al., 2014; Guldhe et al., 2016).

Saturated fatty acids from microalgae are used to produce biodiesel due to their high thermal and oxidative stability (Singh *et al.*, 2014). However, long-chain unsaturated fatty acids are suitable for pharmaceutical and food applications (Borges *et al.*,

2011). In the present study reduction of PUFAs. especially EPA. microalgae harvested by sacrificial electrodes may be due to the fact that unsaturated fatty acids are highly oxidative processes vulnerable (Singh et al., 2014; Hosseini Shekarabi and Shamsaie Mehrgan, 2021). Indeed, oxidation and degradation of anode electrode is main drawback of ECH method using sacrificial electrodes (Kim et al., 2012a, 2012b). However, technology of using non-destructive electrodes in ECH method can be used to harvest algal biomass for various industrial and food purposes (Perreault et al., 2010; Misra et al., 2015). On the contrary, Guldhe et al. (2016) pointed out that ECH process did not affect the fatty acid composition of *T*. Ankistrodesmus falcatus and sacrificial obliauus biomass bv electrodes compared to non-sacrificial electrodes (graphite). This conflict in the results can be related to various factors such as environmental conditions, technology used in ECH process, algal biomass density and species (Misra et al., 2014).

The results of this study showed that concentrations of Al and Fe were dramatically increased in the microalgae harvested by sacrificial electrodes and in terms of concentration, it exceeded standard limits for aquaculture, irrigation, and even indirect human contact (maximum 10 mg/L) (Uduman et al., 2010). Although concentration of Fe was much higher than that in the algal biomass harvested by centrifugation method (control group), low concentration of Al can cause greater environmental and human hazards compared to Fe (Ribes et al., 2008). In agreement with our results. Baierle et al. demonstrated that residual level of Al in Desmodesmus subspicatus harvested by Al electrode was more than that harvested by centrifugation method. Since concentration of Al is directly associated with health risks (Bondy, 2010), using Al electrodes in ECH is not an appropriate technique for human or animal consumption, while it is recommended to harvest microalgae with sacrificial electrodes for biodiesel production.

The results of our study showed that harvesting efficiency for N. oculata in sacrificial electrodes was higher than graphite electrode, while harvesting efficiency in control group (centrifugation method) was more than experimental groups. Although filtration and centrifugation methods have higher harvesting efficiency than **ECH** methods. these common harvesting methods require more energy and time (Baierle et al., 2015). The process of harvesting microalgae by ECH is influenced by various parameters such as species, size of microalgae, biomass density, electrochemical conditions (i.e. current voltage, intensity. and type electrodes) (Misra et al., 2014). From our results, harvesting efficiency of N. oculata in Al electrode treatment was higher than that of Fe electrode. Similarly, Baierle et al. (2015) reported 95.4% harvesting efficiency using Al

electrodes compared to Fe electrodes (64.7%) for *D. subspicatus*. In general, Al electrodes cause higher harvesting than Fe and efficiency graphite electrodes for three main reasons: (1) Al is more reactive to participate in electrolysis reactions and generate more cations (Al<sup>3+</sup>) than other metals, which increase flocculation microalgae by binding to the cells (Wong et al., 2017); (2) electrical conductivity of Al is more than iron (Cañizares et al., 2005; Zongo et al., 2009); and (3) higher toxicity of aluminum produced hydroxide accelerates the cell death and consequently sedimentation rate (Duan and Gregory, 2003; Gao et al., 2010).

In the present study, harvesting efficiency of N. oculata in graphite electrode treatment was 67.66%, which was significantly lower than that of metal electrodes. This may be due to absence of metal cations. In consistence with our results, Misra et al. (2014) showed that minimum harvesting efficiency for C. sorokiniana and T. obliquus was recorded in graphite electrodes treatment in comparison with metal electrodes. that of Vandamme et al. (2011) reported a higher harvesting efficiency 92%) for Chlorella vulgaris by sacrificial electrodes.

This study showed that using sacrificial and non-sacrificial electrodes for ECH of *N. oculata* caused significant changes in lipid and protein contents as well as fatty acids profile. The highest crude protein content and unsaturated fatty acids were seen in the

microalgae harvested by graphite electrode. However, the highest level of oils with a high content of saturated fatty acids was extracted from the microalgae harvested by Al electrodes. According to high accumulation of Al in the microalgae cells harvested by Al electrodes, this harvesting technique is recommended for biofuel production, however, further research is required to evaluate its environmental pollution.

#### Acknowledgments

The authors wish to thank Mr. Hamid Fathalian at Fisheries Laboratory (Science and Research Branch, Islamic Azad University) for helping us to quantify microalgae fatty acids and electrochemical process.

#### References

Ahmad, A.K. and Shuhaimi-Othman, M., 2010. Heavy metal concentrations in sediments and fishes from Lake Chini, Pahang, Malaysia. *Journal of Biological Sciences*, 10(2), 93–100. DOI:10.3923/jbs.2010.93.100.

Al-Yaqoobi, A.M., Al-Rikabey, M.N. and Al-Mashhadani, M.K.H., 2021. Electrochemical harvesting of microalgae: parametric and costeffectivity comparative investigation. Chemical Industry and Chemical Engineering Quarterly, 27(2), 121–130. DOI:10.2298/CICEQ191213031A.

Anthony, R.J., Ellis, J.T., Sathish, A., Rahman, A., Miller, C.D. and Sims, R.C., 2013. Effect of coagulant/flocculants on bioproducts

- from microalgae. *Bioresource Technology*, 149, 65–70. DOI:10.1016/j.biortech.2013.09.028.
- AOAC, 2000. Official methods of analysis of the association of official analytical chemists, 17<sup>th</sup> edition. Horwitz, W., editor. AOAC International, Maryland, USA.
- Baierle, F., John, D.K., Souza, M.P., Bjerk, T.R., Moraes, M.S., Hoeltz, M., Rohlfes, A.L., Camargo, M.E., Corbellini, V.A. and Schneider, **R.C.**, 2015. **Biomass** from microalgae separation by electroflotation with iron and aluminum spiral electrodes. Chemical Engineering Journal, 267, 274-281.
- **Bondy, S.C., 2010.** The neurotoxicity of environmental aluminum is still an issue. *Neurotoxicology*, 31(5), 575–581.

DOI:10.1016/j.cej.2015.01.031.

DOI:10.1016/j.neuro.2010.05.009.

- Borges, L., Morón-Villarreyes, J.A., D'Oca, M.G.M. and Abreu, P.C., 2011. Effects of flocculants on lipid extraction and fatty acid composition of the microalgae *Nannochloropsis oculata* and *Thalassiosira weissflogii. Biomass and Bioenergy*, 35(10), 4449–4454. DOI:10.1016/j.biombioe.2011.09.00 3.
- Borges, L., Caldas, S., D'Oca, M.G.M. and Abreu, P.C., 2016.

  Effect of harvesting processes on the lipid yield and fatty acid profile of the marine microalga Nannochloropsis oculata.

- Aquaculture Reports, 4, 164–168. DOI:10.1016/j.agrep.2016.10.004.
- Cañizares, P., Carmona, M., Lobato, J., Martinez, F. and Rodrigo, M., 2005. Electrodissolution of aluminum electrodes in electrocoagulation processes. Industrial and Engineering Chemistry Research, 44(12), 4178–4185. DOI:10.1021/ie048858a.
- Chua, E.T. and Schenk, P.M., 2017.

  A biorefinery for *Nannochloropsis*:
  Induction, harvesting, and extraction of EPA-rich oil and high-value protein. *Bioresource Technology*, 244, 1416–1424.
  DOI:10.1016/j.biortech.2017.05.124.
- **Duan, J. and Gregory, J., 2003.**Coagulation by hydrolysing metal salts. *Advances in Colloid and Interface Science*, 100, 475–502. DOI:10.1016/S0001-8686(02)00067-2.
- Folch, J., Lees, M. and Stanley, G.H.S., 1957. A simple method for the isolation and purification of total lipides from animal tissues. *Journal of Biological Chemistry*, 226(1), 497–509. DOI:10.1016/s0021-9258(18)64849-5.
- Gao, S., Du, M., Tian, J., Yang, J., Yang, J., Ma, F. and Nan, J., 2010. Effects of chloride ions on electrocoagulation-flotation process with aluminum electrodes for algae removal. *Journal of Hazardous Materials*, 182(1–3), 827–834. DOI:10.1016/j.jhazmat.2010.06.114.
- Gao, Y., Yang, M. and Wang, C., 2013. Nutrient deprivation enhances lipid content in marine microalgae.

Bioresource Technology, 147, 484–491.

DOI:10.1016/j.biortech.2013.08.066.

- Ghernaout, D., 2019. Electrocoagulation process for microalgal biotechnology-A Review. *Applied Engineering*, 3(2), 85-94. DOI:10.11648/j.ae.20190302.12.
- Guldhe, A., Misra, R., Singh, P., Rawat, I. and Bux, F., 2016. An innovative electrochemical process to alleviate the challenges for harvesting of small size microalgae by using non-sacrificial carbon electrodes. *Algal Research*, 19, 292–298.

DOI:10.1016/j.algal.2015.08.014.

Hosseini Madani, N.S., Hosseini S.P., Shamsaie Shekarabi, Mehrgan, M. and Pourang, N., Can 2020. 2. 4dichlorophenoxyacetic acid alter growth performance, biochemical composition, and fatty acid profile of the marine microalga Isochrysis galbana? Phycologia, 59(6), 598-605.

DOI:10.1080/00318884.2020.18278 26.

- Hosseini Madani, N.S., Shamsaie Mehrgan, M., Hosseini Shekarabi, S.P. and Pourang, N., 2021. Regulatory effect of gibberellic acid (GA3) on the biomass productivity and some metabolites of a marine microalga, *Isochrysis galbana*. *Journal of Applied Phycology*, 33(1), 255–262. DOI:10.1007/s10811-020-02291-1.
- Hosseinni Shekarabi, S.P., Shamsaie Mehrgan, M., Razi, N. and Sabzi,

- **S., 2020.** Biochemical composition and fatty acid profile of the marine microalga *Isochrysis galbana* dried with different methods. *Journal of Microbiology, Biotechnology and Food Sciences*, 9(1), 521–524. DOI:10.15414/jmbfs.2019/20.9.3.52 1-524.
- Hosseini Shekarabi, S.P. and Shamsaie Mehrgan, M., 2021. Cultivation of *Tetraselmis suecica* using a fishmeal factory effluent: effect on the growth, biochemical composition, and nutrient removal. *Journal of Applied Phycology*, 33, 1949–1959. DOI:10.1007/s10811-021-02478-0.
- Hua, L., Guo, L., Thakkar, M., Wei,
  D., Agbakpe, M., Kuang, L.,
  Magpile, M., Chaplin, B.P., Tao,
  Y. and Shuai, D., 2016. Effects of anodic oxidation of a substoichiometric titanium dioxide reactive electrochemical membrane on algal cell destabilization and lipid extraction. Bioresource Technology, 203, 112–117.

DOI:10.1016/j.biortech.2015.12.041.

Hua, L., Cao, H., Ma, Q., Shi, X., Zhang, X. and Zhang, W., 2020. Microalgae filtration using an electrochemically reactive ceramic membrane: Filtration performances, fouling kinetics, and foulant layer characteristics. *Environmental Science and Technology*, 54(3), 2012–2021.

DOI:10.1021/acs.est.9b07022.

Kagan, M.L., Sullivan, D.W., Gad, S.C. and Ballou, C.M., 2014. Safety assessment of EPA-rich polar lipid

- oil produced from the microalgae *Nannochloropsis* oculata. *International Journal of Toxicology*, 33(6), 459–474. DOI:10.1177/1091581814553453.
- Kim, J., Ryu, B.G., Kim, B.K., Han, J.I. and Yang. J.W., 2012a. Continuous microalgae recovery using electrolysis with polarity exchange. Bioresource Technology, 111. 268-275. DOI:10.1016/j.biortech.2012.01.104.
- Kim, J., Ryu, B.G., Kim, K., Kim,
  B.K., Han, J.I. and Yang, J.W.,
  2012b. Continuous microalgae recovery using electrolysis: effect of different electrode pairs and timing of polarity exchange. *Bioresource Technology*, 123, 164–170.
  DOI:10.1016/j.biortech.2012.08.010.
- Krishnamoorthy, N., Unpaprom, Y., Ramarai. R., Maniam. Govindan, N., Arunachalam, T. and Paramasivan, B., 2021. Recent advances and future prospects of electrochemical processes for microalgae harvesting. Journal of **Environmental** Chemical 9(5), 105875. Engineering, DOI:10.1016/j.jece.2021.105875.
- **Lauritano, C., Ferrante, M.I. and Rogato, A., 2019.** Marine natural products from microalgae: An-omics overview. *Marine Drugs*, 17(5), 269. DOI:10.3390/md17050269
- **Lee, A. K., Lewis, D.M. and Ashman, P.J., 2013.** Harvesting of marine microalgae by electroflocculation: the energetics, plant design, and economics. *Applied Energy*, 108, 45–53.

- DOI:10.1016/j.apenergy.2013.03.00 3.
- Liu, S., Hajar, H.A.A., Riefler, G., and Stuart, **B.J.**, 2018. Investigation electrolytic of flocculation microalga for Scenedesmus sp. using aluminum graphite electrodes. RSC Advances. 8(68). 38808-38817. DOI:10.1039/c8ra08101h.
- Matter, I.A., Bui, V.K.H., Jung, M., Seo, J.Y., Kim, Y.E., Lee, Y.C. and Oh, Y.K., 2019. Flocculation harvesting techniques for microalgae: A review. **Applied** 9(15), 3069. Sciences. DOI:10.3390/app9153069.
- Misra, R., Guldhe, A., Singh, P., Rawat, I. and Bux, F., 2014. Electrochemical harvesting process for microalgae by using nonsacrificial carbon electrode: A sustainable approach for biodiesel production. *Chemical Engineering Journal*, 255, 327–333. DOI:10.1016/j.cej.2014.06.010.
- Misra, R., Guldhe, A., Singh, P., Rawat, I., Stenström, T.A. and Bux, F., 2015. Evaluation of operating conditions for sustainable harvesting of microalgal biomass applying electrochemical method using non sacrificial electrodes. *Bioresource Technology*, 176, 1–7. DOI:10.1016/j.biortech.2014.11.014.
- Perreault, F., Dewez, D., Fortin, C., Juneau, P., Diallo, A. and Popovic, R., 2010. Effect of aluminum on cellular division and photosynthetic electron transport in *Euglena gracilis* and *Chlamydomonas acidophila*.

- Environmental Toxicology and Chemistry, 29(4), 887–892. DOI:10.1002/etc.109.
- Rastar, M., Hosseini Shekarabi, S.P., Shamsaie Mehrgan, M. and Sabzi, S., 2018. Effects of iron and zinc concentrations growth on performance and biochemical of composition Haematococcus pluvialis: A comparison between nanoparticles and their corresponding metals bulks. Journal of Algal Biomass Utilization, 9(2), 59-67.
- Ribes, D., Colomina, M., Vicens, P. and Domingo, J., 2008. Effects of oral aluminum exposure on behavior and neurogenesis in a transgenic mouse model of Alzheimer's disease. *Experimental Neurology*, 214(2), 293–300.
  - DOI:10.1016/j.expneurol.2008.08.01 7.
- Richmond, A., 2008. Handbook of microalgal culture: biotechnology and applied phycology. Wiley Publishers, Hoboken, New Jersey, USA. DOI:10.1002/9780470995280.
- Sabzi, S., Shamsaie Mehrgan, M., Rajabi Islami, H. and Hosseini Shekarabi, S.P., 2021. Changes in biochemical composition and fatty acid accumulation of *Nannochloropsis oculata* in response to different iron concentrations. *Biofuels*, 12(1), 1–7. DOI:10.1080/17597269.2018.14896 72.
- Safi, C., Zebib, B., Merah, O., Pontalier, P.Y. and Vaca-Garcia, C., 2014. Morphology, composition,

- production, processing and applications of *Chlorella vulgaris*: A review. *Renewable and Sustainable Energy Reviews*, 35, 265–278. DOI:10.1016/j.rser.2014.04.007.
- Singh, B., Guldhe, A., Rawat, I. and Bux, F., 2014. Towards a sustainable approach for development of biodiesel from plant and microalgae. Renewable and Sustainable Energy Reviews, 29, 216–245.
  - DOI:10.1016/j.rser.2013.08.067.
- Stadtman, E.R., 1990. Metal ion-catalyzed oxidation of proteins: biochemical mechanism and biological consequences. *Free Radical Biology and Medicine*, 9(4), 315–325. DOI:10.1016/0891-5849(90)90006-5.
- Uduman, N., Qi, Y., Danquah, M.K., Forde, G.M. and Hoadley, A., 2010. Dewatering of microalgal cultures: a major bottleneck to algae-based fuels. *Journal of Renewable and Sustainable Energy*, 2(1), 012701. DOI:10.1063/1.3294480.
- Vandamme, D., Pontes, S.C.V., Goiris, K., Foubert, I., Pinoy, L.J.J. and Muylaert, K., 2011.

  Evaluation of electro-coagulation—flocculation for harvesting marine and freshwater microalgae.

  Biotechnology and Bioengineering, 108(10), 2320–2329.

  DOI:10.1002/bit.23199.
- Wong, Y., Ho, Y., Leung, H., Ho, K., Yau, Y. and Yung, K., 2017. Enhancement of *Chlorella vulgaris* harvesting via the electrocoagulation-flotation (ECF) method.

Environmental Science and Pollution Research, 24(**10**), 9102–9110. DOI:10.1007/s11356-016-7856-x.

Yin, Z., Zhu, L., Li, S., Hu, T., Chu, R., Mo, F., Hu, D., Liu, C. and Li, B., 2020. A comprehensive review on cultivation and harvesting of microalgae for biodiesel production: Environmental pollution control and future directions. *Bioresource Technology*, 301, 122804. DOI:10.1016/j.biortech.2020.122804

Yoo, G., Park, W.K., Kim, C.W., Choi, Y.E. and Yang, J.W., 2012. Direct lipid extraction from wet *Chlamydomonas reinhardtii* biomass

using osmotic shock. *Bioresource Technology*, 123, 717–722. DOI:10.1016/j.biortech.2012.07.102.

Zongo, I., Maiga, A.H., Wéthé, J., Valentin, G., Leclerc, J.P., Paternotte, G. and Lapicque, F., 2009. Electrocoagulation for the treatment of textile wastewaters with Al or Fe electrodes: Compared variations of COD levels, turbidity and absorbance. *Journal of Hazardous Materials*, 169(1–3), 70–76.

DOI:10.1016/j.jhazmat.2009.03.072.